Chalmers University of Technology Department of Signals and Systems Automatic Control Group

Exam questions for Linear Control System Design, SSY285

April 10^{th} , 2017

Cover page

1. Timeframe: 4 hours.

2. Examiner: Balazs Kulcsar, internal phone number: 1785, kulcsar@chalmers.se

- 3. Necessary condition to obtain the exam grade is to have the course's mandatory project (all assignments and the lab) approved. Without approved mandatory project, the archived exam results are invalid.
- 4. 20 points can be reached in total (with 0.5 point resolution), Lic/PhD students have to reach at least 12 points to pass. For Msc students Table 1 shows the grading system.

Table 1: Grading for Msc students

Points	Grade
1011.5	3
$12 \dots 15.5$	4
$16 \dots 20$	5

- 5. During this written exam, it is optionally permitted to use printed materials such as:
 - Either of the course textbooks (only 1 book): (hardcopy or plain printed version, without notes inside!)
 - (i) Feedback systems, an introduction for scientists and engineers by K. J. Åström and R. M. Murray, ISBN-13: 978-0-691-13576-2, OR (ii) Reglerteknikens grunder by Bengt Lennartson, ISBN: 91-44-02416-9, (iii) Reglerteknik: grundläggande teori, T Glad, L Ljung.
 - 1 piece of A4 paper, with hand written notes on both sides. Copied sheet can not be used.
 - Pocket calculator (non-programmable, cleared memory, without graphical plotting function).
 - Mathematical handbook Beta (without notes inside!).
- 6. Note that phones, tablets, computers, any other communication devices are not allowed to use during the exam session. In scheduled exam session for the course at Chalmers, teacher(s) will show up in person in the first and last 60 min.
- 7. Examination results will be advertised no later than April 20th 2017 (pingpong.chalmers.se). Inspection of results in person, April 24th 10-11 am, E-building floor 6, room 6414 (S2 Bla Rummet).

Good luck!

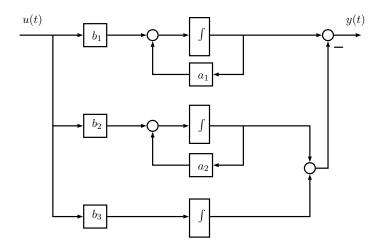


Figure 1: Open-loop state space block diagram

Questions

- 1. Briefly answer the questions with motivation (each **0.5 point**, total **2 point**).
 - a) Explain briefly the difference between Lyapunov and asymptotic internal stability conditions for continuous time LTI state space representations.
 - b) Briefly explain the following system properties: time-invariance, linearity.
 - c) Why do we apply Loop Transfer Recovery in case of LQG controller? Explain briefly how the methodology works.
 - d) Is the LQR controller robust? In what sense, metrics can you quantify it?
- 2. Given the following system model by means of block diagram in Figure 1 with $a_1 = -1, a_2 = 1, b_1 = -1, b_2 = 2, b_3 = 0.5$.
 - a) Derive the state-space representation in terms of matrix differential equation (A, B, C, D) for model depicted in Fig. 1 (1 point).
 - b) By using the matrices (A, B, C, D), compute the transfer function G(s) (1 point).
 - c) Based on G(s), is this a non-minimum phase representation? Is the transfer function matrix strictly proper? Is the system input-output stable? Is the system internally stable? Briefly motivate your answers (2 point)!
 - d) What is the steady state value for y if $u(t) = 1 \ \forall t > 0$ is applied? (0.5 point)
 - e) Assume $u(t) = 0 \ \forall t \text{ and } x(0) = x_0 = \begin{bmatrix} 1 & 1 & 1 \end{bmatrix}^T$. What is the value for y(1)? (1 point)
 - f) With $a_2 = 0$ is the state space representation (A, B, C, D) observable? (1 point)
- 3. Given the following state-space representation by,

$$x(k+1) = \begin{bmatrix} -1.5 & -0.5 \\ -\alpha & 0 \end{bmatrix} x(k) + \begin{bmatrix} \frac{1}{\alpha} \\ 2 \end{bmatrix} u(k)$$
$$y(k) = \begin{bmatrix} 2 & \frac{1}{\alpha} \end{bmatrix} x(k)$$

with $0 < |\alpha| < \infty$,

- a) Is the state-space representation asymptotically stable for all values of α ? (1 point)
- b) With $\alpha = -1$ is the representation reachable and controllable? (1 point)

- c) With $\alpha = 1$, find the (similarity) state transformation matrix T that renders the state space description into diagonal form. With the help of T transform the system into a diagonal representation, $(\tilde{A}, \tilde{B}, \tilde{C})!$ (2 point)
- d) With $\alpha = 1$ and find $u(k) = -\tilde{K}\tilde{x}(k) + k_r r(k)$ where $K = \begin{bmatrix} k_1 & k_2 \end{bmatrix}$ such that the closed-loop poles are allocated to -1 (both) (hint: use the diagonal form!). Find k_r such that $r_{\infty} = y_{\infty}$! (1.5 point)
- 4. Consider the following control problem given by,

$$\begin{aligned} \dot{x}_1(t) &= -x_1(t) + u(t) \\ \dot{x}_2(t) &= x_2(t) \\ J(u) &= \frac{1}{2} \int_0^\infty \left(q_u \cdot u^2(t) + x_1^2(t) + x_2^2(t) \right) dt \end{aligned}$$

a) With $q_u = 0.1$ find the steady-state LQR state feedback gain (\tilde{K}) that minimizes J(u) by applying the following solution matrix structure,

$$\bar{P} = \begin{bmatrix} p_1 & p_1 \\ p_1 & p_2 \end{bmatrix}$$

What are the closed loop poles? (2 point).

- b) Find the optimal cost value for the closed loop system if $x_0 = \begin{bmatrix} 1 & 1 \end{bmatrix}$? (1 point)
- c) Now, suppose we do not have direct access to the states and the open loop state space description is noise corrupted as,

$$\dot{x}_1(t) = -x_1(t) + u(t) + v_1(t)
\dot{x}_2(t) = x_2(t) + v_2(t)
y(t) = x_2(t) + w(t)$$

with zero mean, uncorrelated, and normally distributed random noises w, v, intensities of the r_w is 0.1. Find the intensity matrix R_v if the solution to the steady state FARE is .

$$\bar{P} = \begin{bmatrix} 0.4494 & 0.1006 \\ 0.1006 & 0.3466 \end{bmatrix}$$

Find the poles of the closed-loop observer associated to the above solution. (2 point)

5. Given the following state-space representation and cost functional by,

$$\dot{x}(t) = x(t) + 2u(t) + \sqrt{3}d(t)$$

$$y(t) = cx(t)$$

$$J(u, d) = \frac{1}{2} \int_0^\infty (y^2(\tau) + u^2(\tau)q_u - \gamma^2 d^2(t)) d\tau$$

where $\gamma = 1$, $q_u = \gamma$. Find the best case control input and worst case disturbance feedback gains that results in $J(u^*, d^*) = \min_u \max_d J(u, d)$. Then draw the block diagram for the closed loop (integrator, signal streams, amplifiers) (1 point)